


CATALOG'20



Russian designer and manufacturer  
of communication equipment

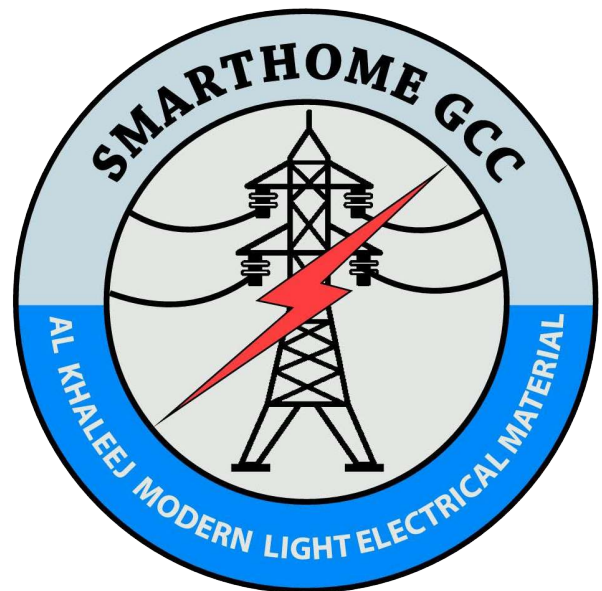

**Tel: +974 77 88 1342**

**Email: [info@smarthomegcc.com](mailto:info@smarthomegcc.com)**

**[www.smarthomegcc.com](http://www.smarthomegcc.com)**



- **28 years of experience** in designing and manufacturing telecommunication equipment
- More than **750 employees**
- **14 software development laboratories**
- **2 industrial complexes** in Novosibirsk (Russia) and Almaty (Kazakhstan)
- **More than 100 partner companies** in Russia, CIS, Europe, Asia and the Middle East
- **More than 1500 client companies**

1

## Development

- Hardware
- Software

2


## Manufacture

- Surface-mount technology
- Through-hole technology
- Assembling
- Software installation
- Testing of serial production equipment

3


## Maintenance

- Technical support
- Service center
- Software updating
- Repair

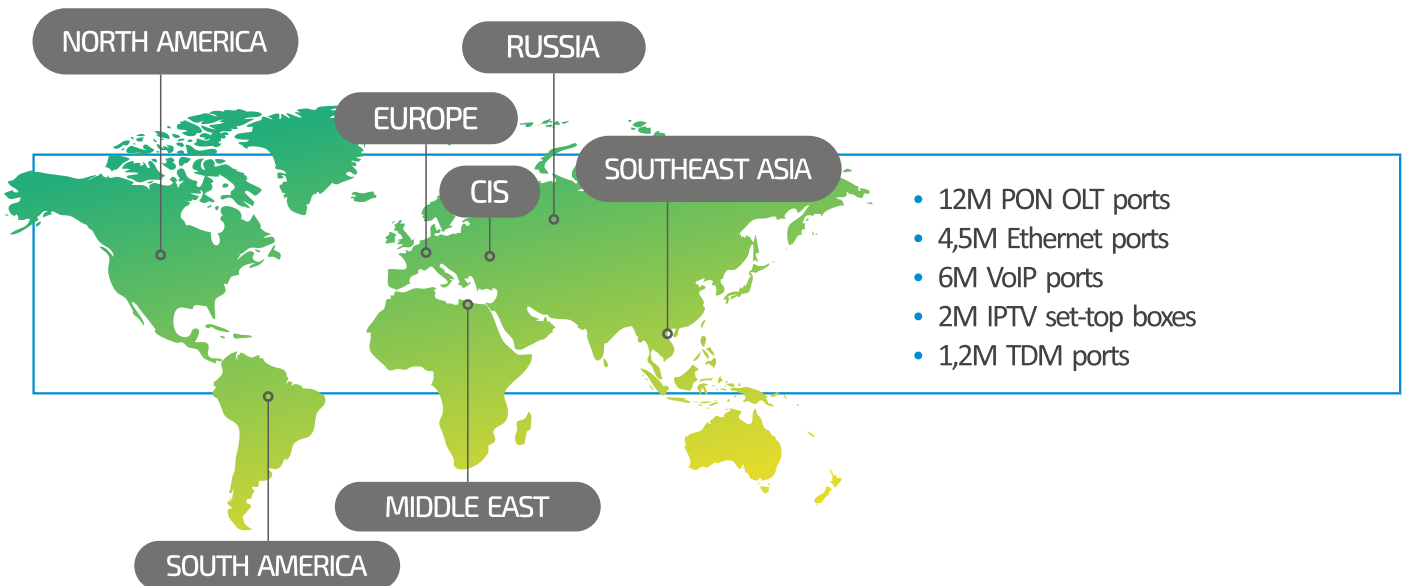



# AUTOMATIC METER READING

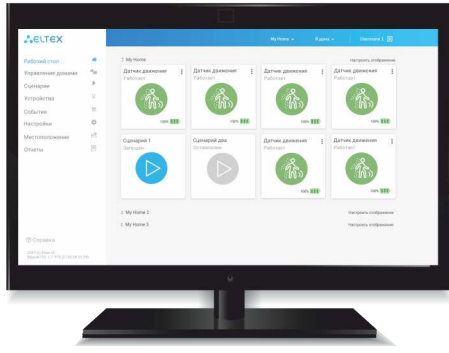

## “ELTEX SC” platform

Hardware-software system for construction solutions on the basis of IoT technology.

It can be used to provide Smart control, Smart office and Smart building services as well as to collect data from metering devices. The system allows to construct digital economy infrastructure.

Name	Controller with the function of recorder		Recorders				Converters	
	Energy consumption recorder	Energy consumption recorder	Water and heating consumption recorder	Water and heating consumption recorder			MD1-CV-RS485A	MD1-CV-RS232A
	SZ-CP04EC	SZ-P04C	SZ-W02	SZ-W08				



Basic technical specifications								
Processor	Realtek 1 GHz							
RAM	128 MB							
Flash	32 MB							
OS	Linux							

**MD1-CV-RS485A and MD1-CV-RS232A** converters allow to connect individual metering devices and communal meters with a digital interface (RS-485, RS-232) as well as to convert their data according to the Ethernet technology

Interfaces					Interfaces	
Ethernet	10/100Base-T (RJ-45)				10/100Base-T (RJ-45)	
Pulse input	4	4	2	8		

Wireless interface parameters								
Transmitter power	6 dBm							
Frequency range	869 dBm							
Receiver sensitivity	103 dBm							
Max operating distance	30 m							

Physical parameters and parameters of environment								
Power supply	230/400V 50 Hz	230/400V 50 Hz	Power battery: CR123A (battery average work time is 4 year)				12V	
Operating temperature	from 0 to 55°C						from 0 to 55°C	
Operating humidity	20-80%						20-80%	
Form factor	Plastic case for DIN rail mounting	Plastic case for DIN rail mounting	Waterproof plastic case			Plastic case		
Dimensions (WxHxD)	106.25x90.2x57.5	71x90.2x57.5	64x58x35	145x65x40	90x50x32			

